


*Multiple-toothed pawls provide greater contact with rack bar*

*Plated Springs Resist Corrosion*

*Adjustable Spring Links*

*Ductile iron housing for maximum strength*

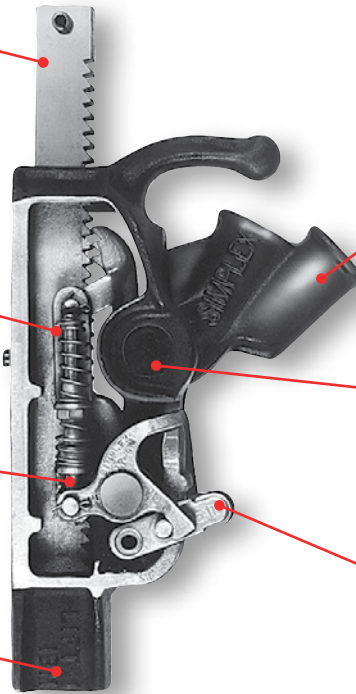

*Double-lever sockets for changing handle angle*

*Replaceable Trunnion Bearings*

*Reversing Lever*

Ratchet Model Jack Shown

## PRODUCT LINE OVERVIEW

### ► The Industry Standard

With over a century of experience in designing and manufacturing mechanical jacks, Simplex is the undisputed market leader that has set the standard for high quality and reliability in the mechanical jack industry.

### ► The Widest Selection

Only Simplex can offer a full range of Ratchet Jacks, Screw Jacks, Superjacks, Push/Pull Jacks and Mine Roof Supports to fit a broad range of applications and use.

### ► Unsurpassed Quality

Simplex Jacks have proven to withstand the toughest application and use in today's market. Each Jack component is carefully inspected and assembled by highly skilled assemblers and tested to meet or exceed ANSI B30.1 Safety Standards.

### ► Value and Service

Simplex stands behind every mechanical jack we sell with a NO SMALL PRINT WARRANTY supported by our global network of Industrial Distributors and Authorized Service Centers.

### Methods Of Mechanical Force



**Ratchet Jacks**

◀ *Ratcheting mechanism used to create leverage for movement.*



**Screw Jacks**

◀ *Mechanical advantage is gained by using a specialized Acme threaded screw.*

### Points To Review When Selecting A Mechanical Jack

Mechanical Jacks

#### **Determine the Proper Jack for your Application**

Ratchet jacks are designed for lifting and positioning up to 15 tons. For higher tonnage applications, you should consider using our Superjacks for lifting and sustaining up to 50 tons. For all sustaining load applications, consider the screw jack as a suitable solution up to 24 tons.

#### **Handle Effort**

Reference each table within this section to determine the amount of handle effort required for an application. Each model number specifies the amount of force required per ton. Also consult your local codes, safety standards or contracts that may specify maximum allowable handle effort per user. Proper jack sizing is required to maintain reasonable handle effort.

#### **Lift and Height of Jack**

The available clearance under the load often determines which jack should be used. For the greatest versatility, select a jack that has the longest available stroke, but still fits under the load. The ratchet jack toe can be used in very low clearance situations where other products are not suited.

#### **Travel Speed**

Ratchet jacks provide greatest travel per stroke, but accommodate lighter loads. Superjacks provide greater lifting capacity with less movement per stroke.

#### **Portability**

If ease of portability is a factor, consider lightweight Ratchet Jack models: RJA1022, RJA1538, or Superjack models: JJA1510C, JJA2510C, JJA2515C, JJA3510D, JJA5010B.

### Ratchet Jacks

Are ideal for mills and factory maintenance, oil fields, shipyards, farms, machinery riggers, construction contactors, mining operators, bridge and rail car repair and heavy-duty industrial maintenance. These are the most versatile, general-purpose jacks available. Rugged construction permits safe, efficient lifting, lowering, skidding, moving, sustaining and leveling with the important SIMPLEX feature that provides full lift capacity on the toe or on the cap.



### Super Jacks

Are used for inspecting and renewing journal brasses, bridge, tank and structural steel erectors, presses, shipbuilding and all industries where powerful, all-position jacks are required. These jacks will hold the load indefinitely and offer heat treated, alloy steel forgings, bronze nuts, ball bearings, positive shoulder stops and high gear ratios. The ratchet mechanisms are fully enclosed to protect them from the elements.



### Screw Jacks

Are suitable for house movers, leveling, supporting, shop and factory maintenance, riggers, locomotive repairs, drillers and farm applications. Malleable housings are lighter and unbreakable. A hardened, large chrome-moly ball floating cap centers the load automatically and reduces friction by 88%. The steel cap is constructed of corrugated, drop-forged steel with a self-leveling 9 degree float.



### Push-Pull Jacks

Are essential for any maintenance repair or production work in all types of shops and field applications. Loadbinder Jacks are used on the construction of bridges and concrete and steel engineering projects. Gravity type pawl is used on boats and barges.



### Trench Braces & Roof Supports

Are designed for putting up cross timbers and steel beams, aligning steel mine cars, a temporary prop in connection with loading equipment, pulling up and removing slack in power cables and pulling and pushing conveyor lines and controlling the tail piece.



# MECHANICAL JACKS

RJ Series - Ratchet Jacks

**SIMPLEX**



RJ84A, RJ85A, RJ1017 & RJ86A Shown

Capacity Range .....► 5 - 20 tons  
 Stroke Range .....► 7 - 21.25 in.  
 Maximum Toe Height Range .....► 1.62 - 2.25 in.

- Multiple-tooth pawls for strength & safety.
- Large base ensures a firm foundation.
- Drop-forged, alloy steel, heat-treated components.
- Plated springs to resist corrosion.
- Double-lever sockets for jacking in close quarters.
- The RJA1538 pole jack is designed for pole pulling applications. Chain and I-Beam are ordered separately.

### THINK SAFETY



Please refer to pages 4&5 for a complete list of safety tips and recommendations.

### CE COMPLIANT



Our Jack design specifications meet or exceed ANSI /ASME B30.1 Safety Standards.

### CARRYING HANDLE



Carrying handles make the positioning and transporting of the 10, 15 and 20 ton ratchet jacks simple.




*Its large lifting and holding capacity and heavy-duty housing, makes the RJ Series Jacks universal tools on any jobsite. ▼*



| Model   | Jack Housing Material | Support Capacity (tons) | Lifting Capacity (tons) | Handle Effort per Ton (lbs) |
|---------|-----------------------|-------------------------|-------------------------|-----------------------------|
| RJ84A   | Steel                 | 5                       | 5                       | 32                          |
| RJ85A   |                       |                         |                         | 32                          |
| RJ86A   |                       |                         |                         | 32                          |
| RJ1017  |                       | 10                      | 10                      | 30                          |
| RJ22B   |                       |                         |                         | 30                          |
| RJ24A   |                       | 20                      | 15                      | 32                          |
| RJ2029  |                       |                         |                         | 32                          |
| RJA1022 | Aluminum              | 10                      | 10                      | 30                          |
| RJA1538 |                       | 15                      | 8                       | 32                          |




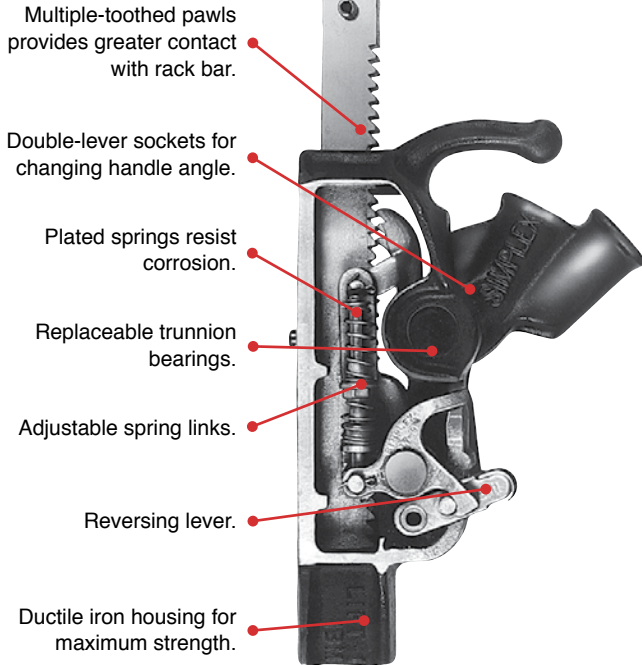

**RECOMMENDED LEVER BARS**  
Please refer to page 148 for additional details.

\* Lever Bars Sold Separately

| Ratchet Jack Model | Lever Bar Model |
|--------------------|-----------------|
| <i>RJ84A</i>       | SLB36           |
| <i>RJ85A</i>       | SLB36           |
| <i>RJ86A</i>       | SLB36           |
| <i>RJ1017</i>      | SLB60           |
| <i>RJ22B</i>       | SLB60           |
| <i>RJ24A</i>       | SLB70           |
| <i>RJ2029</i>      | SLB70           |
| <i>RJA1022</i>     | SLB60           |
| <i>RJA1538</i>     | SLB70           |

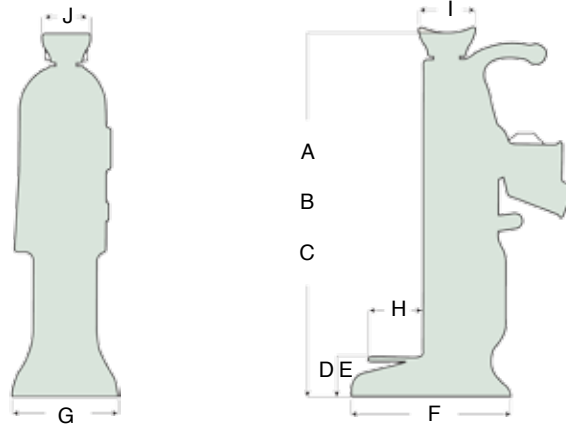

| Dimensions (in) |                |        |                    |                    |             |            |            |            |           | Weight (lbs) | Model          |
|-----------------|----------------|--------|--------------------|--------------------|-------------|------------|------------|------------|-----------|--------------|----------------|
| A               | B              | C      | D                  | E                  | F           | G          | H          | I          | J         |              |                |
| Minimum Height  | Maximum Height | Stroke | Toe Minimum Height | Toe Maximum Height | Base Length | Base Width | Toe Length | Cap Length | Cap Width |              |                |
| 14              | 21             | 7      | 1.75               | 8.75               | 7.38        | 5          | 2.5        | 2.62       | 2.31      | 28           | <i>RJ84A</i>   |
| 17              | 27             | 10     | 1.75               | 11.75              | 7.38        | 5          | 2.5        | 2.62       | 2.31      | 30           | <i>RJ85A</i>   |
| 20              | 33             | 13     | 1.75               | 14.75              | 7.38        | 5          | 2.5        | 2.62       | 2.31      | 35           | <i>RJ86A</i>   |
| 17.25           | 26.75          | 9.5    | 1.62               | 11.13              | 8.75        | 6          | 2.4        | 2.87       | 2.62      | 40           | <i>RJ1017</i>  |
| 21.62           | 33.62          | 12     | 2                  | 14                 | 10.25       | 6.5        | 2.4        | 3          | 2.5       | 70           | <i>RJ22B</i>   |
| 23.25           | 36             | 12.75  | 2.25               | 15                 | 10.25       | 8          | 2.62       | 3.5        | 2.87      | 93           | <i>RJ24A</i>   |
| 28              | 46             | 18     | 2.25               | 20.25              | 11          | 8          | 2.62       | 3.5        | 2.87      | 104          | <i>RJ2029</i>  |
| 21.62           | 33.62          | 12     | 2                  | 14                 | 10.25       | 6.5        | 2.4        | 3          | 2.5       | 42           | <i>RJA1022</i> |
| 37.62           | 59.13          | 21.25  | ---                | ---                | 8.13        | 8.25       | ---        | ---        | ---       | 62           | <i>RJA1538</i> |

Mechanical Jacks

# MECHANICAL JACKS

CR Series - Reel Jacks



Capacity Range .....▶ 5 - 20 tons

Stroke Range.....▶ 9.5 - 14 in.

Minimum Height Range .....▶ 21 - 34.5 in.

- ▶ Double-lever sockets for jacking in close quarters.
- ▶ Multiple-tooth pawls for strength & safety.
- ▶ Drop-forged, alloy steel, heat-treated components.
- ▶ Adjustable spring links for added serviceability.
- ▶ Plated springs to resist corrosion.
- ▶ Precision machining throughout.
- ▶ Steel lever bars sold separately.

CR321B Shown

Mechanical Jacks



### CARRYING HANDLES

Convenient center mounted carrying handle makes this jack easy to position and move.



### LAMINATED BASE

Treated laminated hardwood base provides solid support along with durability.



### CE COMPLIANT

Our Jack design specifications meet or exceed ANSI /ASME B30.1 Safety Standards.



CR320B



CRA1029R

The large wooden bases and low handle efforts on these Reel Jacks enhance safety and reduce operator fatigue. ▼



| Model    | Capacity / Pair   |                  | Handle Effort per Tons (lbs) | Stroke (in) | Dimensions (in) |                |                |                |                |                |
|----------|-------------------|------------------|------------------------------|-------------|-----------------|----------------|----------------|----------------|----------------|----------------|
|          | Side Hooks (tons) | Top Hooks (tons) |                              |             | A               | B              | C              | C <sup>1</sup> | C <sup>2</sup> | C <sup>3</sup> |
|          |                   |                  |                              |             | Minimum Height  | Maximum Height | Minimum Height |                |                |                |
| CR320B   | 5                 | 10               | 72                           | 9.5         | 20.75           | 30.25          | 15.25          | ---            | ---            | ---            |
| CR321B   |                   |                  | 48                           | 14          | 34.50           | 48.50          | 9.25           | 15.63          | 22.00          | 28.38          |
| CRA1029R | 10                | 20               | 40                           | 11.63       | 31.13           | 42.75          | 24.87          | ---            | ---            | ---            |
| CRA1029L |                   |                  |                              | 11.63       | 31.13           | 42.75          | 24.87          | ---            | ---            | ---            |


**RECOMMENDED LEVER BARS**

Please refer to page 148 for additional details.

\* Lever Bars Sold Separately


| Reel Jack Model | Lever Bar Model |
|-----------------|-----------------|
| <b>CR320B</b>   | <b>SLB36</b>    |
| <b>CR321B</b>   | <b>SLB60</b>    |
| <b>CRA1029R</b> | <b>SLB60</b>    |
| <b>CRA1029L</b> | <b>SLB60</b>    |

CR320B

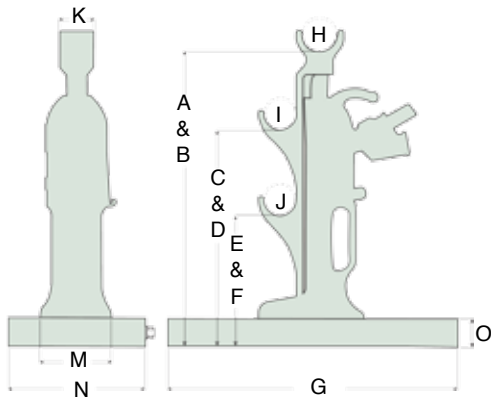


◀ Two CR321B Reel Jacks are used to support this cable spool for line feeding.

CR321B

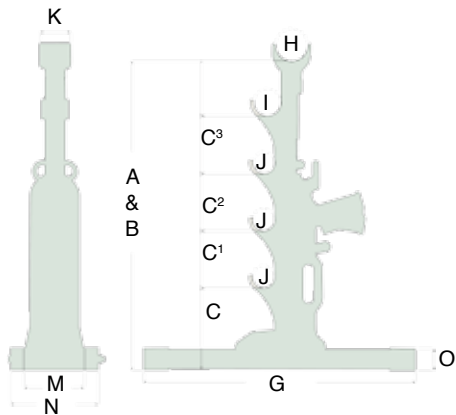

CRA1029R & CRA1029L

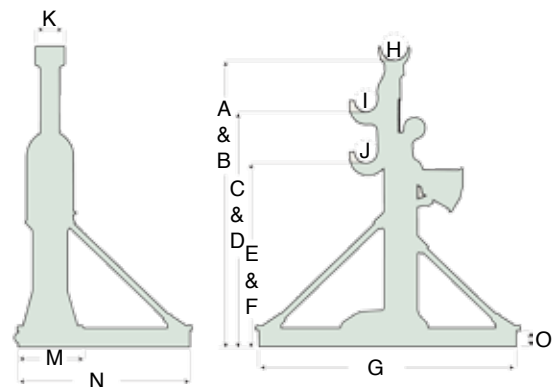

| Dimensions (in) |         |         |        |          |          |          |       |        |       |        | Weight (lbs) | Model           |
|-----------------|---------|---------|--------|----------|----------|----------|-------|--------|-------|--------|--------------|-----------------|
| D               | E       | F       | G      | H        | I        | J        | K     | M      | N     | O      |              |                 |
| Maximum         | Minimum | Maximum | Length | Diameter | Diameter | Diameter | Width | Length | Width | Height |              |                 |
| 24.75           | 9.25    | 18.75   | 20.38  | 2.62     | 2.25     | 2.25     | 2.38  | 5.00   | 9.38  | 2.00   | 51           | <b>CR320B</b>   |
| ---             | ---     | ---     | 30.37  | 3.63     | 3.00     | 2.38     | 3.50  | 6.50   | 9.75  | 2.50   | 125          | <b>CR321B</b>   |
| 36.50           | 18.87   | 30.50   | 30.00  | 3.12     | 2.62     | 2.62     | 3.50  | 6.62   | 7.50  | 2.25   | 86           | <b>CRA1029R</b> |
| 36.50           | 18.87   | 30.50   | 30.00  | 3.12     | 2.62     | 2.62     | 3.50  | 6.62   | 7.50  | 2.25   | 86           | <b>CRA1029L</b> |

# MECHANICAL JACKS

CJ Series - Rack Jacks

**SIMPLEX**



CJ15 & CJ100 Shown

Capacity Range .....▶ 1.65 - 11.13 tons

Stroke Range.....▶ 13.78 in.

Minimum Height Range .....▶ 28.54 in.

- ▶ Developed in accordance with the latest safety regulations.
- ▶ Suitable for lifting loads of any type.
- ▶ The jack is rated for full capacity at both the head and toe lifts.
- ▶ Lifting with either fixed toe or on clawed head.
- ▶ Low expenditure of force through optimal ratio.

Mechanical Jacks



### FOLDING HANDLE


Safety crank with folding handle.



### CE COMPLIANT

Our Jack design specifications meet or exceed ANSI /ASME B30.1 Safety Standards.

Here a CJ100 is used to position this cargo container for repair. Its solid base provides greater stability and more surface area.▼

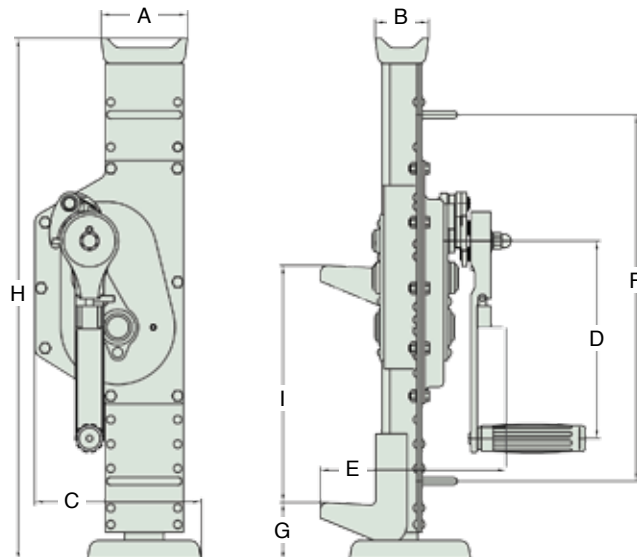

| Model        | Head/Toe Capacity (tons) | Dimensions (in) |       |       |        |       |        |        |                |        | Weight (lbs) |
|--------------|--------------------------|-----------------|-------|-------|--------|-------|--------|--------|----------------|--------|--------------|
|              |                          | A               | B     | C     | D      | E     | F      | G      | H              | I      |              |
|              |                          | Width           | Depth | Width | Length | Depth | Length | Height | Minimum Height | Stroke |              |
| <b>CJ15</b>  | 1.65                     | 3.54            | 1.97  | 5.94  | 9.84   | 7.95  | 20.67  | 2.56   | 28.54          | 13.78  | 29.76        |
| <b>CJ30</b>  | 3.31                     | 3.94            | 1.97  | 8.03  | 9.84   | 8.39  | 20.67  | 2.76   | 28.54          | 13.78  | 48.50        |
| <b>CJ50</b>  | 5.51                     | 4.33            | 2.68  | 8.31  | 9.84   | 9.29  | 20.67  | 2.76   | 28.54          | 13.78  | 61.72        |
| <b>CJ100</b> | 11.13                    | 5.51            | 2.76  | 10.12 | 11.81  | 11.69 | 23.23  | 3.15   | 31.50          | 13.78  | 101.41       |





LPC30 & LPC100 Shown

Capacity Range .....▶ 1.65 - 11.13 tons

Stroke Range .....▶ 11.81 - 13.78 in.

Minimum Height .....▶ 28.50 in.


- ▶ Low body height.
- ▶ Milled rack, geared wheels and tempered gears.
- ▶ Suitable for lifting loads of any type.
- ▶ Safety crank with folding handle.
- ▶ Low expenditure of force through optimal ratio.
- ▶ Lifting with either fixed toe or clawed head.
- ▶ All construction components standardized.

**CE COMPLIANT**  
Our Jack design specifications meet or exceed ANSI /ASME B30.1 Safety Standards.



**THINK SAFETY**  
Please refer to pages 4&5 for a complete list of safety tips and recommendations.

The LPC50 is used to lift this concrete slab. The head and toe capacity along with its mobility, makes the Rack Jacks ideal for various applications. ▼

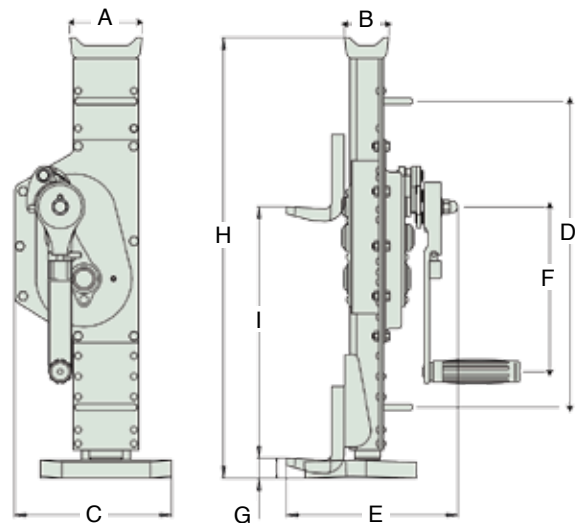

| Model  | Head/Toe Capacity (tons) | Dimensions (in) |       |       |        |       |        |        |                |        | Weight (lbs) |
|--------|--------------------------|-----------------|-------|-------|--------|-------|--------|--------|----------------|--------|--------------|
|        |                          | A               | B     | C     | D      | E     | F      | G      | H              | I      |              |
|        |                          | Width           | Depth | Width | Length | Depth | Length | Height | Minimum Height | Stroke |              |
| LPC15  | 1.65                     | 3.54            | 1.97  | 6.54  | 20.67  | 8.58  | 9.84   | 1.18   | 28.50          | 13.78  | 35.27        |
| LPC30  | 3.31                     | 3.94            | 1.97  | 8.54  | 20.67  | 9.21  | 9.84   | 1.18   | 28.86          | 13.78  | 55.12        |
| LPC50  | 5.51                     | 4.33            | 2.68  | 9.41  | 20.67  | 10.24 | 9.84   | 1.18   | 28.74          | 11.81  | 70.55        |
| LPC100 | 11.13                    | 5.51            | 2.76  | 11.57 | 23.23  | 12.56 | 11.81  | 1.38   | 31.57          | 11.81  | 121.25       |

# MECHANICAL JACKS

PP Series - Push / Pull Jacks

**SIMPLEX**

PP610 Shown



PP61015 Shown

Centered Capacity .....► 10 tons  
 Weight .....► 5 - 13 lbs.  
 Screw Diameter .....► 1.25 in.

- Used for pushing, pulling, holding and more.
- Ideal for weld shops.
- End nuts are designed to permit the use of chains with eye hooks.
- Suitable for adjusting forms, dampers, fixtures and flues.
- Incorporates 1.25-6 ACME 2G Class, right and left hand.

### THINK SAFETY



Please refer to pages 4&5 for a complete list of safety tips and recommendations.



### CE COMPLIANT

Our Jack design specifications meet or exceed ANSI /ASME B30.1 Safety Standards.

A Simplex PP610 is used to separate these I-Beams for proper bridge repair operation and maintenance. ▼




### RECOMMENDED LEVER BARS

Please refer to page 148 for additional details.

\* Lever Bars Sold Separately

| Push/Pull Jack Model | Lever Bar Model |
|----------------------|-----------------|
| PP610                | SLB24           |
| PP61015              | SLB24           |

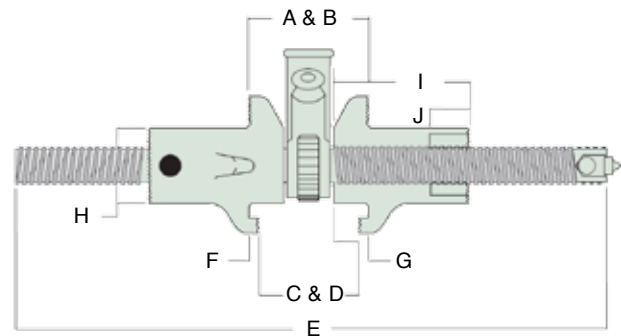

| Model   | Dimensions (in) |         |         |         |        |        |        |        |        |        |
|---------|-----------------|---------|---------|---------|--------|--------|--------|--------|--------|--------|
|         | A               | B       | C       | D       | E      | F      | G      | H      | I      | J      |
|         | Minimum         | Maximum | Minimum | Maximum | Length | Length | Length | Length | Length | Length |
| PP610   | 3.38            | 8.13    | 2.87    | 7.62    | 10     | .31    | .31    | 2.38   | 3.19   | 1.25   |
| PP61015 | ----            | ----    | ----    | ----    | 10     | ----   | ----   | ----   | ----   | ----   |

| Model   | Centered Capacity (tons) | Hook/Toe Offset Load Capacity (tons) | Travel (in) | Handle Effort per ton (lbs) | Screw Diameter (in) | Weight (lbs) |
|---------|--------------------------|--------------------------------------|-------------|-----------------------------|---------------------|--------------|
| PP610   | 10                       | 2                                    | 4.5         | 15                          | 1.25                | 13           |
| PP61015 | 10                       | 2                                    | ----        | 15                          | 1.25                | 5            |



JJA2515C, JJ2510C Shown

Capacity Range ..... ▶ 15 - 50 tons

Stroke Range ..... ▶ 4 - 9 in.

Minimum Height ..... ▶ 10.25 - 15 in.

- ▶ Ratcheting screw jack design.
- ▶ Holds the load indefinitely, and will not creep down.
- ▶ Positive shoulder stop for safety.
- ▶ Available with aluminum or ductile iron housing.
- ▶ Ball bearings for smooth operation and low handle effort.

**CE COMPLIANT**  
Our Jack design specifications meet or exceed ANSI /ASME B30.1 Safety Standards.



**REVERSAL RATCHET**


Raise or lower the load precisely with the reversal ratchet socket with quick spin handle.

**RECOMMENDED LEVER BARS**

Please refer to page 148 for additional details.

\* Lever Bars Sold Separately

| Super Jack Model | Lever Bar Model |
|------------------|-----------------|
| JJ2510C          | SLB36           |
| JJ3510D          | SLB36           |
| JJ5010B          | SLB56           |
| JJA1510C         | SLB36           |
| JJA2510C         | SLB36           |
| JJA2515C         | SLB36           |
| JJA3510D         | SLB36           |
| JJA5010B         | SLB56           |



| Model    | Jack Housing Material | Capacity (tons) | Dimensions (in) |                |        |               |        |              | Handle Effort Per Ton (lbs) | Weight (lbs) |
|----------|-----------------------|-----------------|-----------------|----------------|--------|---------------|--------|--------------|-----------------------------|--------------|
|          |                       |                 | A               | B              | C      | D             | E      | F            |                             |              |
|          |                       |                 | Minimum Height  | Maximum Height | Stroke | Base Diameter | Socket | Cap Diameter |                             |              |
| JJ2510C  | Steel                 | 25              | 10.25           | 15.25          | 5      | 5.5           | 7.5    | 3.13         | 6                           | 43           |
| JJ3510D  |                       | 35              | 10.25           | 15.25          | 5      | 5.5           | 7.5    | 3.13         | 6                           | 44           |
| JJ5010B  |                       | 50              | 10.31           | 14.31          | 4      | 7.25          | 8.81   | 3.93         | 4                           | 80           |
| JJA1510C | Aluminum              | 15              | 10.25           | 15.25          | 5      | 5.5           | 7.5    | 2.38         | 6                           | 38           |
| JJA2510C |                       | 25              | 10.25           | 15.25          | 5      | 5.5           | 7.5    | 3.13         | 6                           | 34           |
| JJA2515C |                       | 25              | 14.87           | 23.87          | 9      | 5.5           | 7.5    | 3.13         | 6                           | 43           |
| JJA3510D |                       | 35              | 10.25           | 15.25          | 5      | 5.5           | 7.5    | 3.13         | 5                           | 34           |
| JJA5010B |                       | 50              | 10.31           | 14.31          | 4      | 7.25          | 8.81   | 3.93         | 4                           | 61           |

# MECHANICAL JACKS

SJ Series - Screw Jacks

**SIMPLEX**




Capacity Range .....► 12 - 24 tons  
 Stroke Range .....► 3.75 - 14.25 in.  
 Minimum Height .....► 9.62 - 23 in.

- Positive welded stop for safety.
- Supports loads indefinitely, and will not creep down.
- Carry handle for ease of transport.
- Four holes for easy positioning of lever bar.
- 9° tilt saddle assists in centering load point.

Mechanical Screw Jack Family Shown

**CE COMPLIANT**  
 Our Jack design specifications meet or exceed ANSI /ASME B30.1 Safety Standards.



### RECOMMENDED LEVER BARS

Please refer to page 148 for additional details.

\* Lever Bars Sold Separately

| Screw Jack Model | Lever Bar Model |
|------------------|-----------------|
| <i>SJ156</i>     | SLB24           |
| <i>SJ158</i>     | SLB24           |
| <i>SJ1512</i>    | SLB24           |
| <i>SJ208</i>     | SLB35           |
| <i>SJ2010</i>    | SLB35           |
| <i>SJ2012</i>    | SLB35           |
| <i>SJ258</i>     | SLB42           |
| <i>SJ2512</i>    | SLB42           |
| <i>SJ2518</i>    | SLB42           |

| Model         | Sustaining Capacity (tons) | Dimensions (in) |        |               |              | Handle Effort Per Ton (lbs) | Weight (lbs) |
|---------------|----------------------------|-----------------|--------|---------------|--------------|-----------------------------|--------------|
|               |                            | A               | B      | C             | D            |                             |              |
|               |                            | Closed Height   | Stroke | Base Diameter | Cap Diameter |                             |              |
| <i>SJ156</i>  | 12                         | 9.63            | 3.75   | 4.75          | 2.88         | 15                          | 10           |
| <i>SJ158</i>  |                            | 11.63           | 5.75   | 5.5           | 2.88         | 15                          | 12           |
| <i>SJ1512</i> |                            | 15.75           | 9.75   | 6.25          | 2.88         | 15                          | 16           |
| <i>SJ208</i>  | 20                         | 11.88           | 5      | 6             | 3.13         | 15                          | 17           |
| <i>SJ2010</i> |                            | 13.75           | 7      | 6.5           | 3.13         | 15                          | 20           |
| <i>SJ2012</i> |                            | 15.75           | 9      | 6.75          | 3.13         | 15                          | 24           |
| <i>SJ258</i>  | 24                         | 13              | 4.25   | 6.5           | 3.25         | 15                          | 28           |
| <i>SJ2512</i> |                            | 17              | 8.25   | 7.25          | 3.25         | 15                          | 37           |
| <i>SJ2518</i> |                            | 23              | 14.25  | 8.5           | 3.25         | 15                          | 52           |

Mechanical Jacks





SCN15 & SC156 Shown

Sustaining Capacity ..... ► 12 - 24 tons  
 Thread Pitch Range..... ► 1.5 - 3 in.  
 Weight Range..... ► 5.5 - 29.25 lbs.



- Holds the load indefinitely without creep down.
- The shoulder nut is placed into piping or other fixed form, and the screw & cap assembly is threaded through it.

**RECOMMENDED LEVER BARS**

Please refer to page 148 for additional details.

\* Lever Bars Sold Separately

| Screw Jack Model | Lever Bar Model |
|------------------|-----------------|
| <i>SJ156</i>     | SLB24           |
| <i>SJ158</i>     | SLB24           |
| <i>SJ1512</i>    | SLB24           |
| <i>SJ208</i>     | SLB35           |
| <i>SJ2010</i>    | SLB35           |
| <i>SJ2012</i>    | SLB35           |
| <i>SJ258</i>     | SLB42           |
| <i>SJ2512</i>    | SLB42           |
| <i>SJ2518</i>    | SLB42           |



| Model                | Sustaining Capacity (tons) | Dimensions (in)                                  |       |      |          |        |       | Weight (lbs) |
|----------------------|----------------------------|--|-------|------|----------|--------|-------|--------------|
|                      |                            | A  | B     | C    | D        | E      | F     |              |
|                      |                            | Modified Acme Thread Diameter - Pitch A (Thread) | Width |      | Diameter | Height |       |              |
| <i>SC156</i>         | 12                         | 1.5 - 3  | 2.87  | 2.25 | .87      | 3.75   | 5.68  | 5.5          |
| <i>SC158</i>         |                            | 1.5 - 3  | 2.87  | 2.25 | .87      | 3.75   | 7.68  | 6.25         |
| <i>SC1512</i>        |                            | 1.5 - 3  | 2.87  | 2.25 | .87      | 3.75   | 11.68 | 7.75         |
| <i>SC208</i>         | 20                         | 2 - 2.5  | 3.13  | 2.87 | .93      | 4      | 7.56  | 10.5         |
| <i>SC2010</i>        |                            | 2 - 2.5  | 3.13  | 2.87 | .93      | 4      | 9.56  | 12           |
| <i>SC2012</i>        |                            | 2 - 2.5  | 3.13  | 2.87 | .93      | 4      | 11.56 | 13.5         |
| <i>SC258</i>         | 24                         | 2.5 - 2.5  | 3.25  | 3.25 | 1.81     | 5      | 7.81  | 16.75        |
| <i>SC2512</i>        |                            | 2.5 - 2.5  | 3.25  | 3.25 | 1.81     | 5      | 11.86 | 21.75        |
| <i>SC2518</i>        |                            | 2.5 - 2.5  | 3.25  | 3.25 | 1.81     | 5      | 17.81 | 29.25        |
| <b>Shoulder Nuts</b> |                            |  |       |      |          |        |       |              |
| <i>SCN15</i>         | ---                        | 1.5 - 3  | 3     | 2.41 | 3        | 2.25   | ---   | 3.25         |
| <i>SCN20</i>         | ---                        | 2 - 2.5  | 4     | 3    | 3.25     | 2.25   | ---   | 5            |
| <i>SCN25</i>         | ---                        | 2.5 - 2.5  | 5     | 3.93 | 4        | 3      | ---   | 11           |

# MECHANICAL JACKS

## 44 Series - Tank Jacks




Tank Jack Family Shown

Capacity .....► 7.5 tons  
 Stroke .....► 2 in.  
 Minimum Height .....► 6 - 18 in.

- Supports and levels verticle, bottom, or side opening filter and storage tanks.
- Rated capacity for all models is 15,000 lbs.
- Screw operation provides infinite adjustment for exact tank leveling and gravity flow.

Mechanical Jacks

| Model         | Order Number | Base Dia. "A" (in) | Base Height "B" (in) | Min. Height "C" (in) | Max. Height "C" (in) | Weight (lbs) |
|---------------|--------------|--------------------|----------------------|----------------------|----------------------|--------------|
| 4406          | 03820        | 5.75               | 4                    | 6                    | 8                    | 10           |
| 4410          | 03840        | 6                  | 8                    | 10                   | 12                   | 12           |
| 4414          | 03860        | 6.5                | 12                   | 14                   | 16                   | 17           |
| 4418          | 03880        | 8                  | 16                   | 18                   | 20                   | 26           |
| <b>Saddle</b> |              |                    |                      |                      |                      |              |
| 4846          | 03993        | -----              | -----                | -----                | -----                | 2.5          |

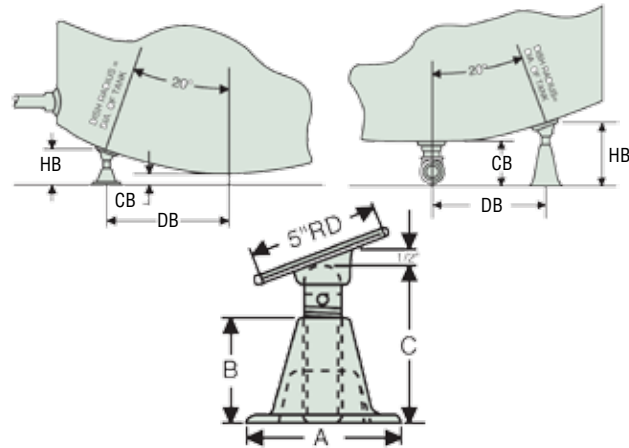

Use the installation data charts, with accompanying drawings, to determine the size and number of jacks your application will require.

| Model                            | Tank Dia. (ft-in) | Pipe Dia. (in) | "DB" (in) | "HB" (in) | "CB" (in) | Quantity Required |             |
|----------------------------------|-------------------|----------------|-----------|-----------|-----------|-------------------|-------------|
|                                  |                   |                |           |           |           | Under 12 Ft.      | Over 12 Ft. |
| <b>For Side Pipe Connections</b> |                   |                |           |           |           |                   |             |
| 4406                             | 3-6               | ---            | 14        | 6.5       | 4         | 4                 | 4           |
| 4406                             | 4-0               | ---            | 16        | 6.38      | 3.5       | 4                 | 4           |
| 4406                             | 4-6               | ---            | 18        | 6.75      | 3.5       | 4                 | 4           |
| 4406                             | 5-0               | ---            | 20        | 7.13      | 3.5       | 4                 | 4           |
| 4406                             | 5-6               | ---            | 22        | 7.5       | 3.5       | 4                 | 4           |
| 4406                             | 6-0               | ---            | 24        | 6         | 1.5       | 4                 | 4           |
| 4406                             | 6-6               | ---            | 26        | 6.13      | 1.5       | 4                 | 4           |
| 4406                             | 7-0               | ---            | 28        | 6.5       | 1.5       | 4                 | 6           |
| 4406                             | 7-6               | ---            | 30        | 6.87      | 1.5       | 4                 | 6           |
| 4406                             | 8-0               | ---            | 32        | 7.25      | 1.5       | 6                 | 8           |
| 4406                             | 8-6               | ---            | 34        | 7.62      | 1.5       | 6                 | 8           |
| 4406                             | 9-0               | ---            | 36        | 8         | 1.5       | 6                 | 8           |
| 4410                             | 9-6               | ---            | 38        | 10.38     | 3.5       | 8                 | 8           |
| 4410                             | 10-0              | ---            | 42        | 10.75     | 3.5       | 8                 | 8           |

| Model                              | Tank Dia. (ft-in) | Pipe Dia. (in) | "DB" (in) | "HB" (in) | "CB" (in) | Quantity Required |             |
|------------------------------------|-------------------|----------------|-----------|-----------|-----------|-------------------|-------------|
|                                    |                   |                |           |           |           | Under 12 Ft.      | Over 12 Ft. |
| <b>For Bottom Pipe Connections</b> |                   |                |           |           |           |                   |             |
| 4410                               | 3-6               | 2              | 14        | 10.5      | 8         | 4                 | 4           |
| 4410                               | 4-0               | 2.5            | 16        | 11.87     | 9         | 4                 | 4           |
| 4410                               | 4-6               | 2.5            | 18        | 12.25     | 9         | 4                 | 4           |
| 4414                               | 5-0               | 2.5            | 20        | 14.62     | 11        | 4                 | 4           |
| 4414                               | 5-6               | 2.5            | 22        | 15        | 11        | 4                 | 4           |
| 4414                               | 6-0               | 3              | 24        | 16.38     | 12        | 4                 | 4           |
| 4414                               | 6-6               | 3              | 26        | 14.62     | 10        | 4                 | 4           |
| 4418                               | 7-0               | 4              | 28        | 18.25     | 13.25     | 4                 | 6           |
| 4418                               | 7-6               | 4              | 30        | 18.62     | 13.25     | 4                 | 6           |
| 4418                               | 8-0               | 4              | 32        | 19        | 13.25     | 6                 | 8           |
| 4418                               | 8-6               | 5              | 35        | 20        | 14        | 6                 | 8           |
| 4418                               | 9-0               | 5              | 37        | 19.5      | 13        | 6                 | 8           |
| 4418                               | 9-6               | 5              | 39        | 20        | 13        | 8                 | 8           |
| 4418                               | 10-0              | 6              | 41        | 21        | 14        | 8                 | 8           |



- Capacity ..... ▶ 20 tons
- Travel Range..... ▶ 14 - 38 in.
- Barrel Range ..... ▶ 18 - 42 in.
- Weight ..... ▶ 57 - 92 lbs.

- ▶ 20 ton capacity models are used for connecting river barges, pulling forms and steel plates.
- ▶ Ideal for bridge construction and steel engineering projects.
- ▶ Equipped with spring activated pawl and 26 in. integrated handle.
- ▶ Can be used in “push” or “pull” applications.

SER20 & SER30 Shown




**CE COMPLIANT**  
Our Jack design specifications meet or exceed ANSI /ASME B30.1 Safety Standards.



**THINK SAFETY**  
Please refer to pages 4&5 for a complete list of safety tips and recommendations.

The Loadbinder Jack was used to tie in the sections of this platform. ▼

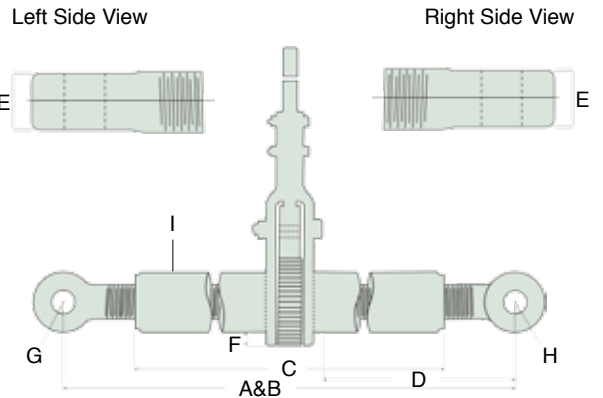

| Model   | Travel Length (in) | Screw Diameter (in) | Dimensions (in) |    |               |                           |                                  |                       |                                       |        |                              | Weight (lbs) |
|---------|--------------------|---------------------|-----------------|----|---------------|---------------------------|----------------------------------|-----------------------|---------------------------------------|--------|------------------------------|--------------|
|         |                    |                     | A               | B  | C             | D                         | E                                | F                     | G                                     | H      | I                            |              |
|         |                    |                     | Eye to Eye      |    | Barrel Length | Left / Right Screw Length | Left / Right Screw Eye Thickness | Ratchet Socket Length | Inner Diameter Left / Right Screw Eye | Radius | Pipe Barrel Outside Diameter |              |
| Minimum | Maximum            |                     |                 |    |               |                           |                                  |                       |                                       |        |                              |              |
| SER10   | 14                 | 2                   | 23              | 37 | 18            | 11                        | 1.87                             | .75                   | 1.31                                  | 1.75   | 3.5                          | 57           |
| SER20   | 20                 | 2                   | 29              | 49 | 24            | 14                        | 1.87                             | .75                   | 1.31                                  | 1.75   | 3.5                          | 66           |
| SER30   | 26                 | 2                   | 35              | 61 | 30            | 17                        | 1.87                             | .75                   | 1.31                                  | 1.75   | 3.5                          | 74           |
| SER40   | 38                 | 2                   | 47              | 85 | 42            | 23                        | 1.87                             | .75                   | 1.31                                  | 1.75   | 3.5                          | 92           |

# MECHANICAL JACKS

PJ Series - Planer Jacks

**SIMPLEX**



PJ1P, PJ2P, PJ3P & PJ4P Shown

**Sustaining Capacity** .....▶ **2 - 8 tons**

**Weight** .....▶ **15 - 12 lbs.**

**Operable Rise** .....▶ **1 - 4 in.**

- ▶ Side locking screw keeps the jack extended and prevents lowering due to vibration.
- ▶ Screw operation provides countless adjustments for exact leveling.
- ▶ Ideal jack for leveling plane beds, millers and machinery.
- ▶ Ball and socket cap swivels to center load forces.
- ▶ Notched base fastens easily to machine beds.

### THINK SAFETY



Please refer to pages 4&5 for a complete list of safety tips and recommendations.

### LOAD CAP




Slotted load cap prevents the load from possible slippage with inline applications.



### CE COMPLIANT

Our Jack design specifications meet or exceed ANSI /ASME B30.1 Safety Standards.

*The notched base and swivel socket cap makes the versatile Planer Jack the perfect choice for repair & maintenance. ▼*

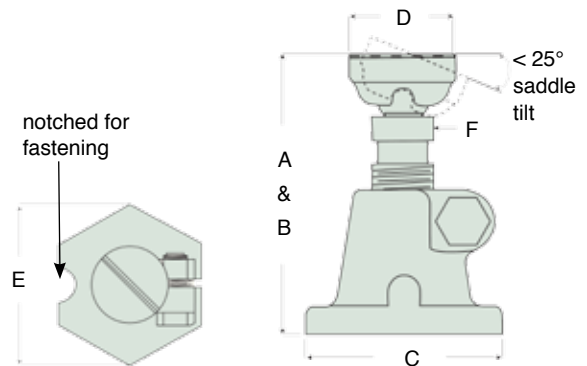

| Model | Sustaining Capacity (tons) | Operable Rise (in) | Dimensions (in) |                |              |              |               |                  | Weight (lbs) |
|-------|----------------------------|--------------------|-----------------|----------------|--------------|--------------|---------------|------------------|--------------|
|       |                            |                    | A               | B              | C            | D            | E             | F                |              |
|       |                            |                    | Minimum Height  | Maximum Height | Across Flats | Cap Diameter | Across Points | Hex Across Flats |              |
| PJ1P  | 2                          | 1                  | 2.75            | 3.75           | 2.38         | 1.25         | 2.75          | .75              | 1.5          |
| PJ2P  | 4                          | 1.5                | 3.75            | 5.25           | 3.13         | 1.68         | 3.62          | 1                | 3            |
| PJ3P  | 6                          | 2.25               | 5.25            | 7.5            | 4            | 2.06         | 4.62          | 1.25             | 6            |
| PJ4P  | 8                          | 4                  | 7.5             | 11.5           | 5.38         | 2.5          | 6.19          | 1.5              | 12           |





S3A Shown

Sustaining Capacity ..... ▶ **3 tons**

Operable Rise ..... ▶ **1 in.**

Weight ..... ▶ **3.3 lbs.**

- ▶ Perfect for close quarters and tight spaces.
- ▶ Supports 3 tons and has a 1 in. stroke for adjustments.
- ▶ Closed height of 3 in.
- ▶ Serrated cap rotates and prevents load slippage.



**CE COMPLIANT**



Our Jack design specifications meet or exceed ANSI /ASME B30.1 Safety Standards.



**LOAD CAP**

Steel serrated load cap prevents the load from possible slippage.

*The S3A, with its low profile and small footprint was the perfect solution to level the bed of this milling machine. ▼*

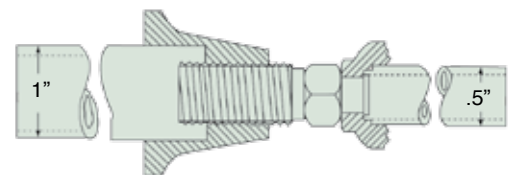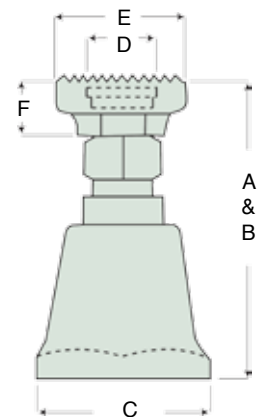

▲ The spreader jack can easily be extended by fitting a .5 in. diameter pipe in the cap well and a 1 in. diameter pipe in the housing well.

| Model | Sustaining Capacity (tons) | Operable Rise (in) | Dimensions (in) |                |      |               |           |            | Weight (tons) |
|-------|----------------------------|--------------------|-----------------|----------------|------|---------------|-----------|------------|---------------|
|       |                            |                    | A               | B              | C    | D             | E         | F          |               |
|       |                            |                    | Minimum Height  | Maximum Height | Base | Well Diameter | Cap Width | Cap Height |               |
| S3A   | 3                          | 1                  | 3               | 4              | 2    | .84           | 1.5       | .68        | 3.25          |



09618, RS139AS78114 Shown

Stroke .....▶ 20 - 38 in.  
Minimum Height .....▶ 66 - 78 in.  
Maximum Height .....▶ 102 - 114 in.

- ▶ The 9225A family is a ratcheting style roof support rated at 4 tons sustaining capacity.
- ▶ The 139A family is a screw extension type roof support rated at 5 tons sustaining capacity.
- ▶ Aluminum alloy housing and base makes this unit light-weight and portable (A9225 Family).
- ▶ Holds the load indefinitely without creep down.

### THINK SAFETY



Please refer to pages 4&5 for a complete list of safety tips and recommendations.



### CE COMPLIANT

Our Jack design specifications meet or exceed ANSI /ASME B30.1 Safety Standards.



### CARRYING HANDLE

Integrated welded handle for ease of transport and positioning.

## HEAD STYLES



### E Type Head

For all standard work.  
Dimension between flanges: 8.13"



### F Type Head

For use with electrical wiring.  
Dimension between flanges: 10.25"





### S Type Head

36 square inches in support area.



This RS Series Roof Support was used to support a horizontal I-Beam while weld work was being done on the verticle I-Beam. ▼



S Style Head



E & F Style Head

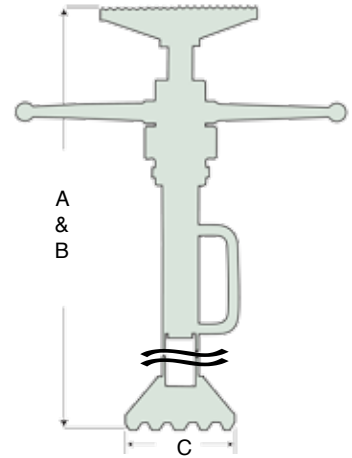

| Dimensions (in)   |              |             |                     |                     |           |                  |                 |              |
|---|--------------|-------------|---------------------|---------------------|-----------|------------------|-----------------|--------------|
| Model   | Order Number | Stroke (in) | A                   | B                   | C         | D                | E               | Weight (lbs) |
|   |              |             | Minimum Height (in) | Maximum Height (in) | Base (in) | Head Length (in) | Head Width (in) |              |
| <b>Complete Unit Ratchet Lever Series - A9225 Family</b>  |              |             |                     |                     |           |                  |                 |              |
| <i>E</i>  | 09602        | 20          | 39                  | 59                  | 7.38      | 8.13             | 2               | 29           |
| <i>F</i>  | 09603        | 20          | 39                  | 59                  | 7.38      | 10.25            | 2               | 29           |
| <i>S</i>  | 09620        | 20          | 39                  | 59                  | 7.38      | 9                | 4               | 29           |
| <i>E</i>  | 09606        | 26          | 45                  | 71                  | 7.38      | 8.13             | 2               | 33           |
| <i>F</i>  | 09607        | 26          | 45                  | 71                  | 7.38      | 10.25            | 2               | 33           |
| <i>S</i>  | 09621        | 26          | 45                  | 71                  | 7.38      | 9                | 4               | 33           |
| <i>E</i>  | 09610        | 38          | 57                  | 95                  | 7.38      | 8.13             | 2               | 36           |
| <i>F</i>  | 09611        | 38          | 57                  | 95                  | 7.38      | 10.25            | 2               | 36           |
| <i>S</i>  | 09622        | 38          | 57                  | 95                  | 7.38      | 9                | 4               | 36           |
| <i>E</i>  | 09614        | 38          | 69                  | 107                 | 7.38      | 8.13             | 2               | 39           |
| <i>F</i>  | 09615        | 38          | 69                  | 107                 | 7.38      | 10.25            | 2               | 39           |
| <i>S</i>  | 09623        | 38          | 69                  | 107                 | 7.38      | 9                | 4               | 39           |
| <i>E</i>  | 09616        | 38          | 75                  | 113                 | 7.38      | 8.13             | 2               | 42           |
| <i>F</i>  | 09617        | 38          | 75                  | 113                 | 7.38      | 10.25            | 2               | 42           |
| <i>S</i>  | 09624        | 38          | 75                  | 113                 | 7.38      | 9                | 4               | 42           |
| <i>E</i>  | 09618        | 38          | 88                  | 126                 | 7.38      | 8.13             | 2               | 48           |
| <i>F</i>  | 09619        | 38          | 88                  | 126                 | 7.38      | 10.25            | 2               | 48           |
| <i>S</i>  | 09625        | 38          | 88                  | 126                 | 7.38      | 9                | 4               | 48           |
| <b>Complete Unit Screw Extension Series - 139A Family</b> |              |             |                     |                     |           |                  |                 |              |
| <i>E</i>  | 09802        | 24          | 42                  | 66                  | 6         | 8.13             | 2               | 50           |
| <i>F</i>  | 09803        | 24          | 42                  | 66                  | 6         | 10.25            | 2               | 50           |
| <i>S</i>  | 09820        | 24          | 42                  | 66                  | 6         | 9                | 4               | 50           |
| <i>E</i>  | 09806        | 30          | 48                  | 78                  | 6         | 8.13             | 2               | 52           |
| <i>F</i>  | 09807        | 30          | 48                  | 78                  | 6         | 10.25            | 2               | 52           |
| <i>S</i>  | 09821        | 30          | 48                  | 78                  | 6         | 9                | 4               | 52           |
| <i>E</i>  | 09814        | 36          | 66                  | 102                 | 6         | 8.13             | 2               | 58           |
| <i>F</i>  | 09815        | 36          | 66                  | 102                 | 6         | 10.25            | 2               | 58           |
| <i>S</i>  | RS139AS66102 | 36          | 66                  | 102                 | 6         | 9                | 4               | 58           |
| <i>E</i>  | 09818        | 36          | 78                  | 114                 | 6         | 8.13             | 2               | 64           |
| <i>F</i>  | 09819        | 36          | 78                  | 114                 | 6         | 10.25            | 2               | 64           |
| <i>S</i>  | RS139AS78114 | 36          | 78                  | 114                 | 6         | 9                | 4               | 64           |

Mechanical Jacks

# MECHANICAL JACKS

RS Series - Roof Support Base & Head Assembly

**SIMPLEX**



**Head Assembly**  
Model 09267



**Base Assembly**  
Model 09220

Stroke ..... ▶ 15 in.

Sustaining Capacity ..... ▶ 8 - 16 tons

Maximum Extended Height ..... ▶ 73 - 93 in.

Maximum pipe length recommendations are based upon the following conditions:

- ▶ Fully extended assemblies loaded to maximum rated capacity.
- ▶ All models incorporate a lever nut handle.
- ▶ The 8 ton models are available with either FS or S style heads.
- ▶ The 16 ton model is available with FS style head only.
- ▶ Head and base securely fixed to prevent lateral movement.
- ▶ A round base (ordered separately) is available to fit the 2" pipe.

## THINK SAFETY



Please refer to pages 4&5 for a complete list of safety tips and recommendations.



## CE COMPLIANT

Our Jack design specifications meet or exceed ANSI /ASME B30.1 Safety Standards.

## HEAD STYLES



**S Type Head**  
36 square inches in support area.




**FS Type Head**  
For support with wooden or rubber cap pieces.



**Optional Pipe Specifications**

Simplex head assemblies are designed for roof support in mines and other areas where ceiling heights vary greatly. Use your own pipe to custom build a support for nearly any application.

- ▶ The 8 ton MS9 models use 2" schedule 40 pipe with a minimum yield strength of 35,000 psi.
- ▶ The 16 ton MS17 model requires 2" schedule 80 pipe with a minimum yield strength of 48,000 psi / 16 ton model.

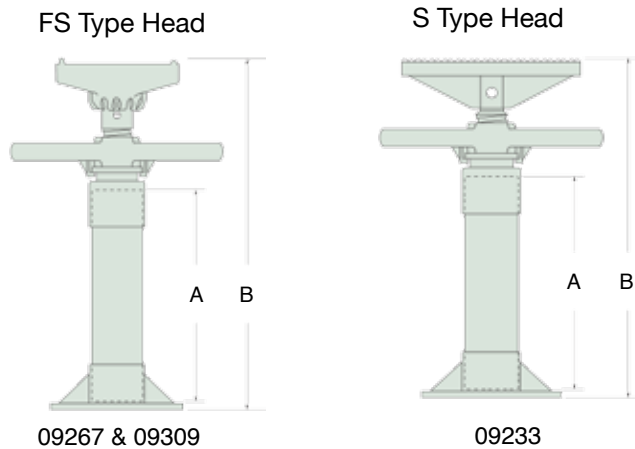


| Dimensions (in) |                            |                              |
|-----------------|----------------------------|------------------------------|
| Model           | "A"<br>Minimum Pipe Length | "B"<br>Minimum Closed Height |
| MS9L-FS         | 20.5                       | 27                           |
| MS9L-S          | 20.62                      | 25.5                         |
| MS17L-FS        | 21.75                      | 28.75                        |

| Model      | Order Number | Head Style | Sustaining Capacity (tons) | Stroke (in) | *Maximum Pipe Length (in) | Maximum Extended Height (in) | Dimension Between Flanges (in) | Weight (lbs) |
|------------|--------------|------------|----------------------------|-------------|---------------------------|------------------------------|--------------------------------|--------------|
| MS9L-FS    | 09267        | FS         | 8                          | 15          | 51.75                     | 73                           | 5.75                           | 19           |
| MS9L-S     | 09233        | S          | 8                          | 15          | 73.25                     | 93                           | ---                            | 19           |
| MS17L-FS   | 09309        | FS         | 16                         | 15          | 46.25                     | 68                           | 5.75                           | 34           |
| Base MB-17 | 09220        | ---        | ---                        | ---         | ---                       | ---                          | ---                            | 6            |

# MECHANICAL JACKS

SE & BE Series - Trench Braces

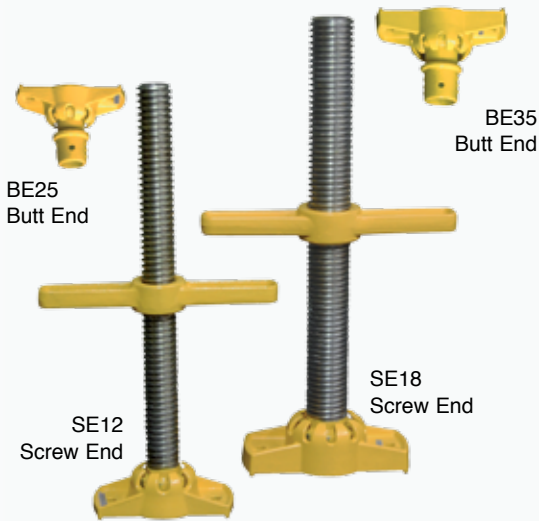

Adjustable Range ..... ▶ 7 - 10 in.  
 Pipe Size ..... ▶ 1.5 - 2 in.  
 Lever Length ..... ▶ 9.5 - 11 in.

- ▶ Provides an efficient, economical protection against cave-ins and costly re-digging in construction & maintenance.
- ▶ Ball socket joints tilt for added safety on angular mounting.
- ▶ Holes on each end facilitates mounting to wood members.

\* Screw & Butt Ends Sold Separately

Mechanical Jacks




### THINK SAFETY

Please refer to pages 4&5 for a complete list of safety tips and recommendations.



### CE COMPLIANT

Our Jack design specifications meet or exceed ANSI /ASME B30.1 Safety Standards.

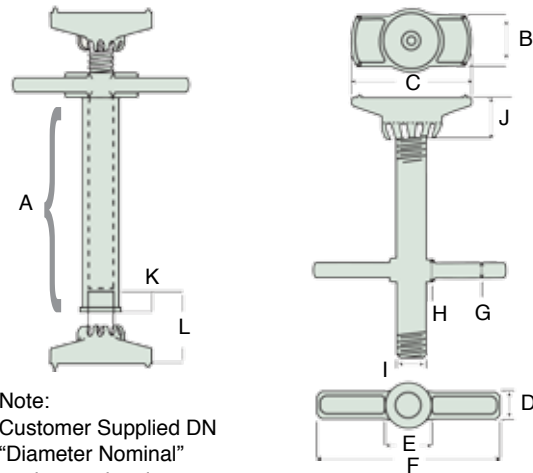

Note:  
 Customer Supplied DN  
 "Diameter Nominal"  
 1.5 in. or 2 in. pipe.


Dimensions assume the use of both screw & butt ends together as an assembly.

| Model (Screw End) | Adjust Range (in)                   | Pipe Size (in) | Dimensions (in)     |       |        |             |                 |              |              |                  |                 |        |                      |               |
|-------------------|-------------------------------------|----------------|---------------------|-------|--------|-------------|-----------------|--------------|--------------|------------------|-----------------|--------|----------------------|---------------|
|                   |                                     |                | A                   | B     | C      | D           | E               | F            | G            | H                | I               | J      | K                    | L             |
|                   |                                     |                | Minimum Pipe Length | Width | Length | Lever Width | Lever Dia. O.D. | Lever Length | Lever Height | Lever Nut Height | Screw Dia. O.D. | Height | I.D. Butt End Height | Collar Height |
| SE12              | 7                                   | 1.5            | 12                  | 2.44  | 5.75   | 1.25        | 2.13            | 9.5          | .68          | 1.13             | 1.38            | 2.44   | ----                 | ----          |
| SE16              | 10                                  | 1.5            | 16                  | 2.44  | 5.75   | 1.25        | 2.13            | 9.5          | .68          | 1.13             | 1.38            | 2.44   | ----                 | ----          |
| SE18              | 10                                  | 2              | 18                  | 2.75  | 7.5    | 1.5         | 2.68            | 11           | .81          | 1.38             | 1.87            | 3      | ----                 | ----          |
| Model (Butt End)  | Screw Ends to be used with Butt End |                |                     |       |        |             |                 |              |              |                  |                 |        |                      |               |
| BE25              | SE12 / SE16                         |                | ----                | 2.44  | ----   | ----        | ----            | ----         | ----         | ----             | ----            | ----   | 1.5                  | 3.87          |
| BE35              | SE18                                |                | ----                | 2.75  | ----   | ----        | ----            | ----         | ----         | ----             | ----            | ----   | 1.93                 | 4.87          |

Simplex Trench Braces provide efficient, economical protection against cave-ins and costly redigging in construction and utility maintenance. Braces extend by turning the lever nut handle. The ball socket joints tilt for added safety on angular mounting. Holes on each end facilitate mounting to wood members.

Simplex trench braces are designed for use with standard schedule 40 pipe. Screw end models SE12, SE16 and butt end model BE25 use 1.5" diameter pipe. Model SE18 and butt end BE35 use 2" diameter pipe. Pipe should be cut to length based on the chart below and drawing in Fig. 1.

Simplex SE Series Trench Braces are used to shore up the walls of this trench for the repair work of underground water pipes. ▼

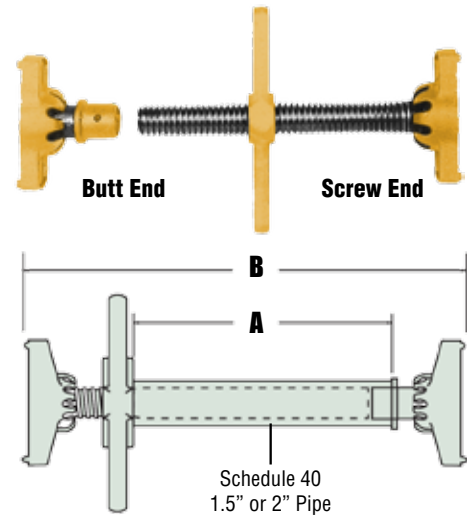

(Fig. 1) All Trench Brace Models

### Quick Reference Timber / Trench Brace Equivalency Tables\*

The following charts are based on OSHA Timber/Trench Brace Charts\* which do not consider transverse loading conditions.

| Trench Depth (ft)   | Horizontal Spacing (ft) | Cross Brace          |              |                       |                       | Wales                 |  | Uprights (in)                          |         |         |         |
|---|-------------------------|----------------------|--------------|-----------------------|-----------------------|-----------------------|--|--|---------|---------|---------|
|   |                         | Width of Trench (ft) |              |                       | Vertical Spacing (ft) | Size (in)             | Vertical Spacing (ft)                  | Max. Allowable Horizontal Spacing (ft) |         |         |         |
|   |                         | up to 4              | up to 6      | up to 8               |                       |                       |  | 4'                                     | 5'      | 6'      | 8'      |
| Soil Type - A $P^a = 25 \times H + 72$ psf (2ft. Surcharge) |                         |                      |              |                       |                       |                       |  |  |         |         |         |
| 5 to 10   | up to 6                 | SE12<br>SE16         | SE12<br>SE16 | SE18                  | 4                     | ---                   | ---                                    | ---                                    | ---     | 2" x 6" | ---     |
|   | up to 8                 | SE12<br>SE16         | SE12<br>SE16 | SE18                  | 4                     |                       |  | ---                                    | ---     | ---     | 2" x 6" |
|   | up to 10                | SE18                 | SE18         | SE18                  | 4                     | 8 x 8                 | 4                                      | ---                                    | 2" x 6" | ---     | ---     |
|   | up to 12                | SE18                 | SE18         | ---                   | 4                     | 8 x 8                 | 4                                      | ---                                    | ---     | 2" x 6" | ---     |
| 10 to 15  | up to 6                 | SE12<br>SE16         | SE12<br>SE16 | SE18                  | 4                     | ---                   |  | ---                                    | ---     | 3" x 8" | ---     |
|   | up to 8                 | SE18                 | SE18         | ---                   | 4                     | 8 x 8                 | 4                                      | 2" x 6"                                | ---     | ---     | ---     |
| Soil Type - B $P^a = 45 \times H + 72$ psf (2ft. Surcharge) |                         |                      |              |                       |                       |                       |  |  |         |         |         |
| Trench Depth (ft)   | Horizontal Spacing (ft) | Cross Brace          |              | Vertical Spacing (ft) | Wales                 |                       | Uprights (in)                          |  |         |         |         |
|   |                         | Width of Trench (ft) |              |                       | Size (in)             | Vertical Spacing (ft) | Max. Allowable Horizontal Spacing (ft) |  |         |         |         |
|   |                         | up to 4              | up to 6      |                       |                       |                       | 3'                                     |  |         |         |         |
| 5 to 10   | up to 6                 | SE18                 | SE18         | 5                     | 6 x 8                 | 5                     | 2" x 6"                                |  |         |         |         |

### STEEL LEVER BARS & ACCESSORIES

| <i>Model</i>   | <b>Description</b>        | <b>Length (in)</b> | <b>Diameter (in)</b> | <b>Weight (lb)</b> |
|----------------|---------------------------|--------------------|----------------------|--------------------|
| <b>SLB24</b>   | Round Lever Bar           | 24                 | .75                  | 4                  |
| <b>SLB35</b>   | Round Lever Bar           | 36                 | .81                  | 6                  |
| <b>SLB36</b>   | Round Lever Bar           | 36                 | 1                    | 8                  |
| <b>SLB42</b>   | Round Lever Bar           | 42                 | 1.13                 | 12                 |
| <b>SLB56</b>   | Round (Tapered) Lever Bar | 56                 | 1.14                 | 16                 |
| <b>SLB60*</b>  | Chisel Point Lever Bar    | 60                 | 1.25                 | 17                 |
| <b>SLB70</b>   | Chisel Point Lever Bar    | 72                 | 1.25                 | 20                 |
| <b>IB1538</b>  | I - Beam Base             | 20                 | ---                  | 44                 |
| <b>CHA1538</b> | Heavy Duty Chain          | 84                 | .62                  | 29                 |

\* Note: The SLB60 lever bars can be interchangeable with the SLB70 model, resulting in lower handle efforts.