


Simplex Reel Jacks Are Standard Equipment At Utilities.

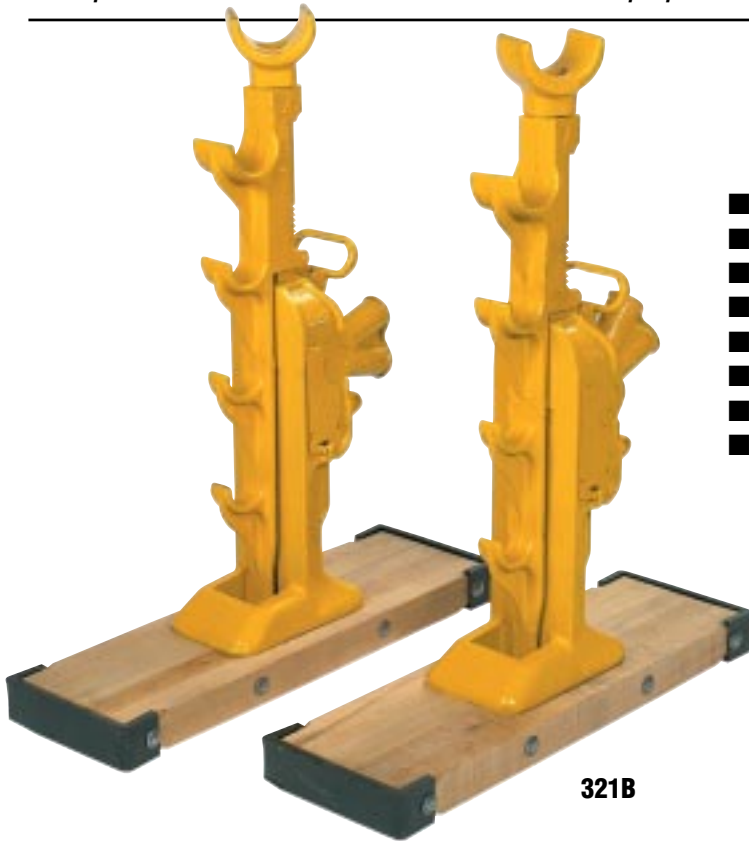

321B

- 4 Models.
- Double-lever sockets.
- Multiple-tooth pawls for strength & safety.
- Forged alloy steel, heat-treated components.
- Adjustable spring links.
- Plated springs to resist corrosion.
- Precision machining throughout.
- Steel lever bars sold separately.

■ **Model 320B**

With three hooks; top fits up to 2 1/2 inch spindles; side hooks fit up to 2 inch spindles.

■ **Model 321B (shown above)**

With five hooks; top fits up to 3 1/2 inch spindles, next hook down fits up to 3 inch spindles, and lowest three fit up to 2 3/8 inch spindles. This model is recommended for use on firm surfaces.

■ **Model A1029**

The A1029 has a light weight aluminum alloy housing and three hooks; top fits up to 3 inch spindles, side hooks fit up to 2 3/8 inch spindles. Equipped with right or left-handed t-base, supported by three adjustable steel rods to provide a sturdy, non-rocking foundation for outside use. Caps swivel for easy reel mounting. Steel lever bars are ordered separately.



Using A1029-R and A1029-L, utilities can easily handle large reels. The large wooden bases and low handle efforts enhance safety and reduce operator fatigue. Simplex Reel Jacks are also an excellent choice for wire rope and sling manufacturers.

### Reel Jacks

Model Number	Capacity per Pair		Handle Effort per Ton (lbs)	Stroke (in)	Reel Dia. (in)	Top Hook Height (in)	Weight (lbs)	Steel Lever Bars			
	Side Hooks (tons)	Top Hooks (tons)						Order Number	Length (in)	Dia. (in)	Weight (lbs)
320B	5	10	32	10	20-60	21	51	10640	36	1	8
321B				12	20-96	34 1/2	128				
A1029-R	10	20	22	11 5/8	36-84	31 1/8	86	*10665	60	1 1/4	17
A1029-L											

\*Lever bar 10675 can be substituted resulting in lower handle effort.